





MP WITH SKIP



MP WITHOUT SKIP



MODELLO TYPE	A	B	C	D	E	F	G	H	I	J	K	L	Q	R	S
MP 150/100	1730	1105	1010	750	505	160	1085	1500	80	1800	1610	750	1320	380	615
MP 375/250	1730	1260	1270	910	460	355	1530	1500	100	2300	1630	900	1575	380	755
MP 565/375	2140	1335	1590	1110	555	430	1870	1610	120	2620	1760	1000	1900	480	910
MP 750/500	2491	1505	1835	1200	500	550	2100	1795	140	2955	1990	1100	2155	560	1050
MP 1125/750	2900	1630	2015	1340	670	520	2270	2050	140	3320	2190	1220	2380	610	1140
MP 1500/1000	3045	1740	2215	1455	750	540	2470	2180	180	3450	2320	1380	2560	640	1225
MP 1875/1250	3045	1740	2400	1455	750	540	2470	2180	160	3500	2320	1350	2800	658	1325
MP 2250/1500	3200	2050	2612	1600	750	670	2740	2330	180	4370	2340	1500	2975	700	1428
MP 3000/2000	4200	2540	3470	1735	1230	685	3710	2450	200	5450	3190	1730	3792	700	1845
MP 3750/2500	4200	2540	3470	1735	1230	685	3710	2450	200	5450	3190	1730	3792	700	1845
MP 4500/3000	-	-	4000	1756	1025	550	-	-	200	-	-	1730	4600	1200	2200
MP 6000/4000	-	-	4000	1756	1025	550	-	-	200	-	-	1730	4600	1200	2200

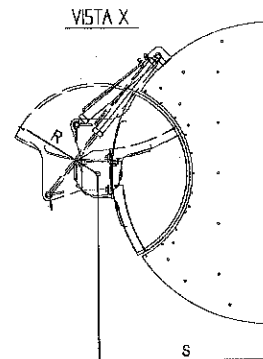

TECHNICAL CHARACTERISTICS

TYPE		MP 75/50	MP 150/100	MP 375/250	MP 565/375	MP 750/500	MP 1125/750	MP 1500/1000	MP 1875/1250	MP 2250/1500	MP 3000/2000	MP 3750/2500	MP 4500/3000	MP 6000/4000
DRY FILLING CAPACITY (*)	cu.yd	0.1	0.2	0.5	0.7	1	1.5	2	2.5	3	4	5	6	8
	l	75	150	375	565	750	1125	1500	1875	2250	3000	3750	4500	6000
CONCRETE OUTPUT PER CYCLE (COMPACTED) (*)	cu.yd	0.07	0.13	0.3	0.5	0.7	1.0	1.3	1.7	2.0	2.6	3.3	4	5.33
	l	50	100	250	375	500	750	1000	1250	1500	2000	2500	3000	4000
MAXIMUM LOAD CAPACITY	lb	265	530	1320	1990	2650	3970	5290	6610	7940	10580	13230	15870	21160
	kg	120	240	600	900	1200	1800	2400	3000	3600	4800	6000	7200	9600
SKIP VOLUMETRIC CAPACITY	cu.yd	0.1	0.2	0.5	0.8	1.1	1.6	2.2	2.7	3.3	4.4	5.5	5.5	8
	l	85	165	412	616	825	1237	1650	2060	2475	3300	4125	4390	6000
MAXIMUM SKIP LOAD CAPACITY	lb	220	440	1100	1650	2200	3300	4400	5500	6600	8800	11000	13300	17700
	kg	100	200	500	750	1000	1500	2000	2500	3000	4000	5000	6000	8000
INNER PAN DIAMETER	Inch	28	39	50	62	72	79	87	94	102	135	135	167	167
	mm	700	1000	1280	1580	1820	2000	2200	2400	2500	3420	3420	4000	4000
MIXING MOTOR(S)	KW	1.5	4	7.5	11	18.5	30	55	55	2 x 30	2 x 45	2 x 45	3 x 45	3 x 55
	HP	2	5.5	10	15	25	40	80	80	2 x 40	2 x 60	2 x 60	3 x 60	3 x 75
HYDRAULIC POWER PACK MOTOR	KW	0.75	0.75	1.5	1.5	1.5	2.2	4	4	4	5.5	5.5	7.5	7.5
	HP	1	1.5	2	2	2	3	5.5	5.5	5.5	7.5	7.5	10	10
SPEED OF PLANETARY GEARBOX	rpm	20	20	20	20	20	20	20	15	15	15	15	10	10
SPEED OF MIXING STAR(S)	rpm	50	35	40	40	45	40	45	40+40	30+30	30+30	30+30	30+30+30	30+30+30
MIXING ARMS	N.	3	3	3	3	3	3	3	6	6	6	6	9	9
SCRAPING ARM(S)	N.	1	1	1	1	1	1	1	1	1	2	2	3	3
WEIGHT OF MIXER WITHOUT SKIP	lb	441	1102	1984	3087	4409	5953	8157	10362	13890	18740	18740	35274	35274
	kg	200	500	900	1400	2000	2700	3700	4700	6300	8500	8500	16000	16000
WEIGHT OF MIXER WITH SKIP	lb	862	1984	3080	4409	5953	8157	10803	13008	16520	26457	26457	48500	48500
	kg	400	900	1400	2000	2700	3700	4900	5800	8400	12000	12000	20530	22000
WEIGHT OF MIXER WITH HOLDING HOPPER	lb	705	1797	2866	4189	5699	7606	10142	11464	117746	25134	25134	41890	44100
	kg	320	815	1300	1900	2585	3450	4600	5200	8050	11400	11400	19000	20000

(*) In order to identify the productivity of the mixer, two parameters must be taken into consideration: